

08-18-00

Case Docket No.: 1

Assistant Commissioner For Patents
Washington, D.C. 20231

Transmitted herewith for filing under the provisions of 37 CFR 1.52 is the patent application of:

Inventor: John Crawford et al
For: IMPROVED DYNAMIC RANGE VIDEO CAMERA, RECORDING SYSTEM, AND RECORDING METHOD.

Enclosed are:

☒ 5 sheets of drawings.

☐ An assignment of the invention to: _____

☐ A verified statement to establish small entity status.

☐ _____

The filing fee has been calculated as shown below:

Small Entity				Large Entity		
For:	No. Filed	No. Extra	Rate	Fee	Rate	Fee
Basic Fee				\$345.00		\$690.00
Total Claims	- 20		x \$ 9.00		x \$18.00	
Ind. Claims	- 3		x \$39.00		x \$78.00	
Mult. Claims			+ \$130.00		+ \$260.00	
Total				Total		

☐ Please charge my Deposit Account No. 16-0221 to cover the filing fee and assignment recording fee. A duplicate copy of this sheet is enclosed.

☐ A check in the amount of _____ to cover the filing fee (and the assignment recording fee) is enclosed.

☐ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0221. A duplicate copy of this sheet is enclosed.

☐ Any additional filing fees required under 37 CFR 1.16.

☐ Any patent application processing fees under 37 CFR 1.17.

☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0221. A duplicate copy of this sheet is enclosed.

☐ Any patent application processing fees under 37 CFR 1.17.

☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

Michael A. Pandiscio 8/17/00

Pandiscio & Pandiscio
470 Totten Pond Road
Waltham, Massachusetts 02451
Tel. (781) 290-0060

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: John Crawford et al
For: IMPROVED DYNAMIC RANGE VIDEO CAMERA,
RECORDING SYSTEM, AND RECORDING METHOD
Attorney's Docket No.: E3-01

BOX PATENT APPLICATION
Assistant Commissioner For Patents
Washington, D.C. 20231

Sir:

FILING OF PATENT APPLICATION UNDER 37 CFR 1.10

The attached application is being filed under the provisions of 37 CFR 1.10.

Applicants' attorney is also submitting the requisite fee as calculated on the
attached transmittal letter.

Respectfully submitted,



Nicholas A. Pandiscio
Reg. No. 17,293
Pandiscio & Pandiscio
470 Totten Pond Road
Waltham, MA 02451-1914
(781) 290-0060

002780 50404960
"EXPRESS MAIL" MAILING LABEL NUMBER EK830463794US

DATE OF DEPOSIT

17 Aug. 2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED
WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST
OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE
DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT
COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

Nicholas A. Pandiscio

(PERSON MAILING)



8/13/00

(SIGNATURE)

**APPLICATION
FOR
UNITED STATES LETTERS PATENT**

TO ALL WHOM IT MAY CONCERN:

Be it known that John Crawford of 11 Donna Pass, Hopkinton, Massachusetts 01748, Herbert A. Thaler of 680 Pleasant Street, Framingham, Massachusetts 01701, and Koichiro Hori of 24 Parker Road, Framingham, Massachusetts 01702, have invented an IMPROVED DYNAMIC RANGE VIDEO CAMERA, RECORDING SYSTEM, AND RECORDING METHOD of which the following description is a specification.

IMPROVED DYNAMIC RANGE VIDEO CAMERA, RECORDING SYSTEM, AND RECORDING METHOD

This application claims the benefit of U.S. Provisional Patent Application No. 60/149,237, filed August 17, 1999 (Attorney Docket No. E3LP-01P).

This invention relates to improving the dynamic range of video systems that produce and record continuous streams of video signals, notably but not exclusively video camera systems that are intended for remote viewing surveillance and inspection, and recording for security purposes.

Background and Prior Art

Use of video camera systems for unattended recording of a scene is well known. In security applications, for example, several video cameras will be connected to a recording system that periodically records a short period of video from each camera. Typically these cameras are designed to work in an auto-exposure mode, where a device called an electronic shutter varies the integration time of each video frame to match the ambient lighting conditions. Typically, these cameras produce a continuous stream of standard video signals that contain two fields of video that are interlaced to create one frame of video. For example, the standard U.S. system, NTSC or RS-170 video, has 262.5 lines of video in one field interlaced with 262.5 lines in a second field, with the second set starting 1/60 sec. later than the first set. The video monitor or recorder used with these signals combines these fields alternately to produce a full frame of video for viewing. In addition, other video systems

exist that are called progressive scan systems. In these latter systems, a full frame of video is created without interlace, typically every 1/60 sec.

In these systems, the video signals are represented by a voltage. In each field or frame, there will be a maximum voltage, representing the maximum amount of light the video system can convert into a signal, and a minimum voltage representing the minimum amount of light the system can reliably represent. In a particular scene viewed by the camera, the image of the scene is converted to a video signal voltage representative of the scene with a range of voltages in between the maximum and minimum values. For a typical scene, and a particular value of auto-exposure, there may be portions of the scene that are too dark to contain any usable information, and other portions that are too light to be of use. In a surveillance application, for example, this can result in a situation where an essential part of the image is too light, or too dark, to be visible.

Heretofore one approach to overcoming the foregoing problem involves use of a combination dual exposure video camera. Combination dual exposure video cameras are commercially available, but are not as common as standard single exposure video cameras. Combination dual exposure camera systems comprise a camera that creates two different exposures of the same optical image via an electronic shutter within the time frame of each field or frame, and means for combining both exposures into a single output field or frame. This results in a single image manufactured from the two different exposure parent images which spans a wider range of scene illumination values, but which is compressed within the voltage limits of a single video frame.

This prior art approach is illustrated schematically in Fig. 1 where a dual exposure camera P1 is viewing a vase on a windowsill while a bird flies

by outside. The camera P1 takes two exposures, a long period exposure represented at P4a, and a short period exposure represented at P4b, each within the time frame of a single video field (interlaced scan) or frame (progressive scan), and combines the video signals representing those two different exposures in a processor P3 according to a pre-programmed algorithm. The resulting image is represented at P4c. Both the bird and vase are visible in the combined image P4c. However, while this image combining process converts a wider range of scene illumination values, it does so at the cost of reducing contrast from the resultant image by omitting various information contained in one or the other of the parent images. This omitted information is viewed in good faith as unimportant to the final image. However, such a judgment is not always proper or acceptable, particularly in video surveillance installations. Further, when such manufactured image fields are recorded, most of this dynamic range improvement is limited in post processing. This is because the information available in the manufactured image fields formed by combining signals no longer contains the full information present in the original pictures.

Objects and Summary of Invention

A primary object of this invention is to provide a method and apparatus for improving the dynamic range of a video system for viewing an object or scene and generating a continuous stream of video signals that define video fields or frames representing the viewed scene or object.

Another object of the invention is to provide a video system for viewing and recording a scene or object with as video camera whereby a stream of video signals is produced that defines a sequence of video fields or frames with video data representing at least two different exposure levels, and

processing that stream of video signals to generate a flicker-free display of recorded images.

A further object of this invention is to provide a method and apparatus for producing a series of video signals representing a sequence of video fields or frames of a selected optical image, with at least certain of the video fields or frames comprising data representing a first exposure level and others of said fields or frames comprising data representing a second greater or lesser exposure level, and utilizing the series of video signals to generate a flicker free video display of the selected optical image.

The foregoing objects, and other objects that are rendered obvious from the following description, are achieved by creating successive video fields or frames with different exposures, merging them into one continuous video signal, and recording each successive field or frame independently. More specifically, this is achieved by providing a video camera with an electronic shutter for capturing an optical image, and controlling operation of the shutter whereby the camera will produce a video signal output comprising a succession of video fields or frames representing the optical image, with a plurality of first video fields or frames representing the optical image at a first exposure level and a plurality of second video fields or frames representing a second exposure level different from the first exposure level, with the first field or frames being interspersed among said second fields or frames. Such video signal output is utilized to generate a video display of the video data matching a particular set, or combination, of exposures. In addition to, or instead of, using the video signal output to provide an individual video display, consisting of the optical images represented by said first or second video fields or frames, concurrently with capturing further optical images, the invention provides for recording the video signal output of the camera for

subsequent use in generating a video display consisting of the optical image data represented by said first or second video fields or frames. In other words, the display may be generated during or after recording. In comparison to the video signal output of the dual exposure camera illustrated in Fig. 1, the recorded video signal of this invention, comprising first and second pluralities of video fields or frames of different exposure levels, possesses a wider effective range of signal values due to the range of exposures recorded, covers a wider gamut of scene illumination, and has a higher dynamic range. By tailoring the number of different exposures to the camera and the video recorder, the full available dynamic range of the camera's video sensor may be preserved. Additionally, the invention optionally includes post-processing of selected exposures to combine fields or frames, or portions of fields or frames, with fields or frames of other exposures, so as to achieve the substantially the same result as is possible with prior art combination dual exposure cameras like that illustrated in Fig. 1, but achieving its purpose using standard, commonly available, video cameras in place of combination dual exposure cameras.

The Drawings

Fig. 1 schematically illustrates a prior art combination dual exposure camera;

Fig. 2 schematically illustrates a preferred embodiment of the invention;

Fig. 3 illustrates details of the buffered signal multiplexer 6 shown in Fig. 2;

Fig. 4 illustrates a second embodiment of the invention; and

Fig. 5 illustrates a further modification of the invention.

In the several figures, like numbers are used to designate like components and like schematic representations.

00640405-081700

Detailed Description of the Invention

Fig 2. illustrates a preferred embodiment of this invention. A video camera 1 is aimed at a vase 2 on a window ledge as a bird flies by outside. The camera has a video detector (not shown) in the form of a photoresponsive CCD or MOS video sensor, and a lens that images the scene on the video detector. In this embodiment, the camera is designed to produce two interlaced fields, field 1 and field 2, per frame, e.g., according to the standard U.S. video system, NTSC or RS-170 video.. Camera 1 also contains an electronic shutter (not shown). CCD and MOS video detectors having electronic shutters are well known, as demonstrated by the following U.S. patents: 5,793,422, issued 11 August 1998 to T. Mochizuki et al.; 5,448,293, issued 5 Sept. 1995 to H. Kogane et al.; 5,410,349, issued 25 April 1995 to H. Tanigawa et al.; 5,283,655, issued 1 Feb. 1994 to M. Usami; 5,247,367, issued 21 Sept. ,1993 to J. Lee; 5,157,502, issued 20 Oct. 1992 to T. Nakajima et al.; 5,075,775, issued 24 Dec. 1991 to Y. Kawaoka et al.; 4,875,100, issued 17 Oct. 1989 to K. Yonemoto et al; and 4,743,778, issued 10 May 1988 to N. Takatsu et al. To the extent that they are relevant, the teachings of those patents are incorporated herein by reference. The electronic shutter of camera 1 is connected to an external controller 3. The electronic shutter allows controller 3 to regulate the integration time of the camera's video detector during each field interval. The camera provides a synchronizing signal to the controller 3, as shown at 3a, so that the latter will cause the camera's electronic shutter to vary the exposure time for each field, i.e., regulate the integrating time of the camera's video detector in synchronism with each video field. During field 1 the controller sets the integration time to a predetermined slow speed, for example, 1/60 second.

During field 2 the controller sets the integration time to a predetermined fast speed, for example, $1/6000$ second. The resulting video signal values for a single row of video data is represented at 4. At 4a, the result of the slow ($1/60$ second) exposure is shown. In this case; the portions of the image representing sky is at the maximum signal level, the vase appears as a slight reduction in signal level, and the bird gives substantially no change in signal since it is so close to the brightness of the sky that it is indistinguishable from the background sky. At 4b, the result of the short ($1/6000$ second) exposure is shown. In this case, the portions of the image representing sky are below the maximum signal level, the vase appears as a drastic reduction in signal level, and the bird gives a significant change in signal since it is sufficiently different from the brightness of the sky to be distinguishable. Essentially the system shown in Fig. 2 uses a single video camera under the control of a pre-programmed exposure controller to provide an output video signal representing a continuous sequence of video fields consisting of fields of one exposure time (e.g., $1/60$ second) alternating with fields of a second exposure time (e.g., $1/6000$ second), as represented at 4d (slow, relatively long time exposure) and 4c (fast, relatively short time exposure).

The camera is connected so as to feed its output video signal, comprising a continuous sequence of video fields alternating in exposure value as represented at 4a and 4b, to a video recorder 5 where the combined alternating long and short exposure video fields are recorded. The camera also is connected so that the same continuous sequence of video fields alternating in exposure levels is delivered to a buffered signal multiplexer 6 which allows a user to select either slow or fast exposure signals for display on a monitor 7, and a selector switch 8 allows a user to display active, i.e., "live", video, or to play back prerecorded video sequences, and select slow or

fast exposures for viewing. This selection of fields for display is commanded via additional exposure selection means forming part of the multiplexer shown in Fig. 3. As an optional modification described in greater detail hereinafter, a field code unit 3b is interposed between the camera and recorder 5 and multiplexer 6, with the field code unit being adapted to add a field code (and other data codes as desired by the user) to the camera's output video signal.

Fig. 3 illustrates details and operation of the buffered signal multiplexer 6 shown of Fig. 2. In the following description of Fig. 3, it is to be understood that the video system does not include field code unit 3b. The multiplexer includes a field detector 9, a blanking circuit 11, an inverter 12 and a selectively loaded repeating first in/first out memory or buffer 14, referred to hereinafter as FIFO 14, which has its video data input side coupled to blanking circuit 11. The camera's output video signal, comprising alternately occurring different exposure value video fields as represented at 4a and 4b, is presented to the detector 9 and also via blanking circuit 11 to FIFO 14. The detector generates a field signal pulse 9f from the camera's output video signal for use in controlling operation of FIFO 14. By way of example but not limitation, field detector 9 may be a conventional video sync. separator circuit. The field signal pulse 9f is high, as shown at 9a, during fields of one exposure and low, as shown at 9b, during the fields of the other exposure. The field signal pulse 9f is applied to that blanking circuit via an exposure selection switch 10. Depending on the position of exposure selection switch 10, the field signal pulse 9f is routed to blanking circuit 11 either directly or via an inverter 12. The field signal pulse 9f serves to gate the blanking circuit so as to blank the signals representing video fields 4a or 4b according to whether the corresponding field pulse signal 9f is or is not inverted. The

output of the blanking circuit is represented at 13. If the field signal pulse applied to it is low, the blanking circuit 11 is rendered inactive and the signal representing the corresponding video field will pass through the blanking circuit without any substantial change, as represented by video signal 13b. However, if the field signal pulse 9f applied to the blanking circuit is high, the signal for the corresponding video field is blanked and the signal output from the blanking circuit will be a fixed voltage level, as represented at 13a. As shown in Fig. 3, switch 10 is set to bypass inverter 12, so that the field pulses 9f are applied without inversion directly to blanking circuit 11. As a result, the short (fast) exposure video field signals 4b are blanked out and long(slow) exposure video field signals 4a pass through the blanking circuit unchanged, as represented at 13b.

Still referring to Fig. 3, the sequence of video field signals 13a, 13b are routed to FIFO 14. Fields of video data are selectively written into FIFO 14 under the control of the field pulse 9f applied via control line 9g. Essentially the field pulse 9f functions as a field selection control signal for FIFO 14.. Readout of the FIFO contents is continuous so as to create a continuous output video data stream. If new video data representing long (slow) exposure video fields, as represented at 4a, is entered into the FIFO, then new data is read out of the FIFO. If, on the other hand, no new data is entered into the FIFO for one or more field times, i.e. if the signals for video fields 4b have been blanked by blanking circuit 11, then the existing data representing video fields 4a coming out of the FIFO will be recirculated in the FIFO and continuously read out in place of the data for the blanked out video fields 4b. Stated another way, if the multiplexer is set to so that blanking circuit 11 will pass only video field signals 4a, the data contained in the video signals 13b that are read into FIFO 14 will be read out in synchronism with

their input into FIFO 14, and will also be stored in FIFO 14. When a video signal 13a representing a blanked video field is passed from blanking circuit 11 to FIFO 14, existing data in FIFO 14 representing a previously recorded video signal 13b will be recirculated and read out in place of that blanked out video signal. This operation results in a continuous sequence of video fields as shown at 7a to 7b', where fields 7a' and 7b' are duplicates of previously occurring fields 7a and 7b, and are inserted in place of blanked fields. Since these video fields all represent essentially the same exposures levels, they can be displayed in sequence flicker-free on a conventional video monitor. The absence of flicker renders the display comfortable to the user's eyes, facilitating assessment of the displayed images.

Still referring to Figs. 2 and 3, the illustrated system may be modified by including the field code unit 3b which inserts a frame code to each video field. The frame code essentially comprises a field code, and preferably the field code unit also is adapted to add to each field such data as a date code, time code, frame serial number code, camera code (preferred, for example, where several cameras are used for surveilling a particular site), other exposure information and/or other information supplied by the user. The frame code is inserted by field code unit 3b under control of the external controller 3. Field code unit 3b is adapted to add a first field code to the signal for video fields or frames of one exposure, e.g., exposure fields 4a, and a second different field code to the signal for video fields or frames of a different exposure, e.g., exposure fields 4b. With this modification, the field detector 9 is adapted to detect the field codes inserted by field code unit 3b and to generate field signal pulses similar to pulses 9a and 9b corresponding to and identifying the two different codes. These field signal pulses, which serve as field selection control signals, are applied to blanking circuit 11 and

FIFO 14, whereby the FIFO can respond to read out a continuous sequence of like video fields as represented at 7a-7b' in the manner previously described. Depending on the setting of switch 10, the output of FIFO 14 applied to monitor 7 will generate a display of the images represented by fields 4a or fields 4b. This modification is advantageous in that the presence of the field codes added by field code unit 3b makes it possible to identify and read out fields 4a or 4b regardless of where they occur in the sequence of video fields represented by the camera's video signal output, and to generate the appropriate field signal pulse for each field. In this connection, it is to be understood that the system of Figs. 2 and 3 also may be used where the video camera is designed for a progressive scan system, i.e., where each frame consists of a single field (e.g., a field consisting of 525 lines) instead of two interlaced video fields (e.g. each field consisting of 262.5 lines). In the case of a progressive scan system, the controller 3 controls the electronic shutter whereby the output signal of the camera represents frames of one exposure value alternating with frames of a second exposure value, the field code unit 3b applies a field code to each frame that identifies each frame according to whether it has the first or second exposure value, and the multiplexer operates under control of the pulse signal 9f to transmit a video output to the monitor 7 that consists of video frames of like exposure value.

Fig 4. illustrates an alternative embodiment of this invention. In this embodiment, the external controller 31a is essentially the same as controller 3 of Fig. 2, but is programmed or adapted to command the camera to produce slow and fast exposure fields as represented at 16 and 15 interspersed among fields of nominal autoexposure value as represented at 17. The system of Fig. 4 also includes a field code unit 3b, a recorder 5, a monitor 7, a multi-channel buffered multiplexer 18 which includes a blanking

circuit (not shown) and FIFO memory (not shown) similar to those shown at 11 and 14 in Fig. 3, a playback decoder 31b, and a switch 8 for selectively coupling to the multiplexer as input data the video signal output from the camera or prerecorded video signals played back from recorder 5. As described in greater detail hereinafter, the field code unit 3b, under control of controller 31a, adds field-identifying field codes to the video fields defined by the video signal output of camera 1. Additionally the controller 31a also generates field selection control signals and the controller and multiplexer 18 are linked as shown to permit those field selection control signals to be passed from controller 31a to the blanking circuit (not shown) of multiplexer 18. In this embodiment, selector switch 8 affords the user the option of sending to buffered multiplexer 18 either active ("live") video, or pre-recorded video sequences. Multiplexer 18 also provides the option, represented herein by a switch 10, of selecting fast video fields 15, slow video fields 16 or nominal exposure video fields 17 for viewing on monitor 7. Essentially as represented by switch 10, the multiplexer has means for selecting which two of the three different exposure video fields are to be blanked out so as to permit the FIFO to read out a continuous sequence of the third exposure video fields. It also is preferred that the multiplexer be adapted to generate exposure-modifying signals and that it be linked to controller 31a as shown so that those exposure-modifying signals can be applied to controller 31a to cause the latter to effect a change in the exposure levels selected for any of fields 15, 16 and 17.

Just as described for the preferred embodiment of Fig. 2, the video fields of different exposures represented at 15, 16 and 17 are recorded in recorder 5 in the sequence in which they are produced. In this case, the field code unit 3b, which is essentially the same as field code unit 3a,

operates under control of controller 31a to insert into the signal for each video field (or each frame in the case of a progressive scan video system) a frame code that necessarily includes a field code which specifically identifies the particular field according whether it is a slow, fast or nominal exposure field. As with the system of Figs. 2 and 3, the frame code inserted by field code unit 3b may also include other data as, for example, date and time codes, frame serial number code, and camera number code. More specifically, the field code unit adds a first field-identifying field code to the video signal for video fields 15, a second field-identifying field code to the video signal for video fields 16, and a third field-identifying field code to the video signal for video fields 17. Further with respect to the field selection control signals produced by controller 31a, a different field selection control signal is generated for each field code and those field selection control signals are applied to the blanking circuit of multiplexer 18. Depending upon the particular exposure video field selected by operation of switch means 10 for viewing on monitor 7, the multiplexer selects certain of the field selection control signals from controller 31a to apply to its blanking circuit to blank out unwanted video fields, whereby to achieve the result of its FIFO reading out a video signal output, for application to monitor 7, which comprises only those video fields having the selected exposure value.

By way of example, multiplexer 18 may be set to select only video fields 15 for display, in which case each time the camera's output signal includes a video field 16 or 17, the multiplexer will substitute in the signal output read from its FIFO video signal data representing a video field 15 for each video field 16 and also for each video field 17. This result is achieved by using the field selection control signals received from controller 31a to cause the blanking circuit to blank out successive video fields 16 and 17, so

that only video fields 15 pass substantially unchanged to the FIFO portion of the multiplexer.

The embodiment of Fig. 4 also includes a playback decoder 31b which is coupled to recorder 5 and also to switch 8. Decoder 31b is adapted to decode the field code inserted by field code unit 3b and generate field selection control signals, corresponding to those generated by controller 31a, and to apply those signals to multiplexer 18 for the purpose of blanking out fields of undesired exposure value and causing the FIFO to read out a continuous sequence of video fields of like exposure values, e.g., fields 15, in the manner described in connection with the embodiment of Figs. 2 and 3.

An obvious advantage of the embodiment of Fig. 4 is that it permits viewing of nominal exposure fields 17 in real time, while simultaneously recording all of the dynamic range fields 15, 16, and 17. The buffer memory of multiplexer 18 is programmed so that it can repeat either long, short, or nominal exposure fields for viewing, while the viewed fields and also the other fields are recorded in a time lapse manner, based on the field codes inserted by the field code unit 3b under control of the external controller 31a.

Fig. 5 illustrates a further advantage of the invention. In this case the system comprises video camera 1, field code unit 3b, controller 31a, and a multiplexer 18a which comprises a field code detector 9, three blanking circuits 11a, 11b and 11c, and three FIFO units 14a, 14b and 14c. The controller is programmed to cause the electronic shutter to change exposures for successive video fields or frames according to a predetermined pattern, e.g., to produce a sequence of video fields as represented at 15, 16 and 17 in Fig. 4. The field code unit 3b, operating under control of controller 31a, inserts field-identifying field codes (either alone or as part of frame codes that also include other information such as date, time, frame number, camera

number, etc.) into the video signal output of camera 1 as in the embodiment of Fig. 4. More specifically, the field code unit adds a first field-identifying field code to the video signal for video fields 15, a second field-identifying field code to the video signal for video fields 16, and a third field-identifying field code to the video signal for video fields 17. Also field code detector 9 generates different field selection control signals in response to its detection of different field codes. Those field selection control codes are applied to blanking circuits 11a, 11b and 11c. The video signal output of camera 1, after the addition of field codes by field code unit 3b, is applied to FIFO 14a, 14b and 14c via blanking circuits 11a, 11b and 11c respectively. The video signal outputs of FIFO 14a, 14b and 14c may be applied to separate monitors 7a, 7b and 7c respectively. Still referring to Fig. 5, as an alternative or additional measure, the outputs of FIFO 14a, 14b and 14c are applied to a conventional video effect generator 27 which is adapted to provide signals for controlling a monitor so that it will display multiple images, e.g. in a picture in a picture (PIP) format as represented schematically by the areas 29a and 29b of a monitor 7c or in a side-by-side format as represented by the areas 29c and 29d of a monitor 7e. It also is contemplated that the video effect generator 27 may be designed so as to cause monitor 7e to produce three simultaneous displays corresponding to the different exposure values of the video fields 15, 16 and 17 read out of FIFO 14a, 14b and 14c respectively.

As with the embodiment of Fig. 4, the system of Fig. 5 operates to blank out undesired video fields for the purpose of providing a display generated by a continuous sequence of video fields of like exposure values. In the system represented in Fig. 5, the field selection control signals received from field code detector 9 cause blanking circuit 11a to blank out video fields 16 and 17, whereby only the data representing video fields 15 is

read into FIFO 14a, and FIFO 14a recirculates that data and substitutes that data for the blanked out data of video fields 16 and 17. Similarly the field selection control signals from detector 9 cause blanking circuit 11b to blank out fields 15 and 17, whereby only the data representing video fields 16 is read into FIFO 14b, and FIFO 14b recirculates that data and substitutes that data for the blanked out data of video fields 15 and 17. Of course, the multiplexer of Fig. 5 may be adapted to generate exposure-modifying signals which are applied to controller 31a for the purpose of modifying the exposure levels for any of the fields 15, 16 or 17.

Although conventional video cameras are designed to produce video signals representing two fields of video that are interlaced to create one frame of video, it is recognized that progressive scan systems are expected to become more prominent with the increased adoption of high definition digital TV. Accordingly, the invention offers the advantage of being applicable to progressive scan video systems. In this connection, it is to be understood that as used herein the term "frame" is to be construed as comprising two interlaced fields as in conventional TV systems, or a single field as is the case in progressive scan systems. Accordingly in the case of single field video frames, the field identification code mentioned above actually identifies a full frame.

The invention is susceptible of various modifications. Thus, for example, the continuous stream of video signals of like exposure level that is read out of multiplexer 6 or 18, either as live video or as playback from recorder 5, may be fed to a recorder, e.g., to recorder 5, for archival and subsequent display purposes. Further, in the case of direct feeding of the camera's output signal to recorder 5, it is contemplated that when that recorded signal is played back and processed by the multiplexer so as to

provide a video signal feed to the monitor comprising a continuous sequence of video signals of like exposure level, that same signal feed will be recorded in recorder 5 or another recorder for subsequent use and analysis.

Another modification involves programming the buffered multiplexer 6 or 18 so that it will produce concurrently a first stream of video signals representing a first exposure level and second stream of video signals representing a second different exposure level, and feeding both streams of video signals to a monitor for display simultaneously. In such case, the monitor may be operated so that the two signal streams provide images that appear as a picture in a picture display or in a split screen display. The appearance of two images on the screen simultaneously, one representing a relatively long exposure and the other representing a relatively short exposure level, offers the advantage of maintaining the full dynamic range that is available using different exposures. It is contemplated also that the embodiment of Fig. 4 may be modified to permit display of three separate images simultaneously, one consisting of relatively long exposure images, a second consisting of relatively short exposure images, and a third consisting of nominal exposure images. Of course, the system also permits the exposure levels to be varied within the dynamic range of the video detector. Further, the number of different exposure levels determined by controller 31a is variable, e.g. five different exposure levels may be selected. As for the camera's controller, it may be programmed so as to generate video fields with different exposures produced in either a consistent or non-consistent repetitive sequence. For example, with a system such as that shown in Figs. 4 or 5 where video fields or frames representing three different exposure levels are produced, the controller may be programmed to fix, or vary at a fixed or random rate or according to a predetermined pattern, the

frequency of repetition of the string of consecutive video fields 17 in the continuous sequence of fields or frames represented in the camera's video output. The same is true of the case where the camera's video signal output is characterized by only first and second video fields or frames representing first and second exposure levels as represented at 4a and 4b. However, in the latter case, it is essential that the system include field code unit 3b and that the latter introduce into the video signal output of the camera field codes that identify and distinguish between the first and second exposure video fields, whereby the multiplexer may be able to select to display images represented by only the first or second video fields or frames.

It also is contemplated that the invention may be modified by using a video camera that lacks an electronic shutter. Thus it is contemplated that the detector may be a photoelectric detector wherein photons are amplified or cascaded to produce an intensified image under low light conditions, e.g., an image intensifier tube. A vidicon is another example. Where the detector lacks an electronic shutter of the type employed in a video camera using a CCD or MOS photodetector, it is contemplated use an LCD light filter whose light transmissibility varies in accordance with a control signal. By positioning this filter between the photodetector and the object or scene being captured, and by varying the filter's control signal, it is possible to vary the amount of light impinging on the photodetector during the time frame of each video field or frame, thereby making it possible to provide different exposure levels similar to what is achieved with the embodiments of Figs. 2 and 4. It also is appreciated that variable irises or other forms of shutters may be used in the invention in place of electronic shutters, but they suffer from limitations not common to electronic shutters, notably inferior response speed, high cost and excess size.

It also is contemplated that the multiplexer 6 or 18 may be programmed or otherwise adapted to process the signal output of the video camera so as to combine the long and short exposure video fields or frames into a single video field or frame, just as is common with dual exposure cameras. However, in order to ensure that alternate light and dark fields represent contemporaneous events, it is necessary that one field or frame be delayed by one field (or frame) time frame (depending on whether interlaced field video or progressive scan video) by means of a delay buffer before being combined with another field (or frame) to produce a continuous video sequence. The multiplexer may be programmed to combine fields or frames of different exposures for display based on a predetermined processing algorithm. However, as with conventional combination dual exposure video cameras, the combined images may be blurred when they are displayed due to the time difference between the fields or frames that have been combined, and also the combined image has a reduced contrast.

The video display may take various forms. In the embodiment of Figs. 2-4, it is preferred that the monitor 7 be a conventional video monitor operating in an analog mode. However, other video display means may be employed, e.g., a cathode ray tube type monitor operating in a digital mode, or an LCD display device. It also is contemplated that a head-mounted or heads-up display may be used.

It is to be understood that the video camera may be a conventional analog mode camera, in which case its output signal is required to be fed to an A/D converter for conversion to a digital signal before it is processed by the buffered multiplexer as described above, and the output signal from the buffered multiplexer is required to be fed to a D/A converter to produce a signal suitable for operating a conventional analog mode video monitor.

Alternatively, the video camera may be a digital camera, thereby eliminating the need to include an A/D converter to permit the video signal to be processed by multiplexer 6 or 18. Similarly, the display device may be of the digital type, thereby eliminating the need to include a D/A device in the system to convert the output video signal from the multiplexer so that it can drive an analog mode video monitor. For sake of simplicity, the A/D and D/A converters are omitted from the drawings, since their need or use is obvious to persons skilled in the art. A further obvious modification is to incorporate the controller 3 or 31a into the camera.

The reader will appreciate that still other embodiments are possible without departing from the scope of the invention.

The invention herein described and illustrated provides a number of advantages. For one thing, it provides a video camera and recording and processing system with improved dynamic range. When compared to a single exposure video sequence as is produced by a conventional single exposure camera or a combined exposure video sequence as is provided by a dual exposure camera, the invention offers the advantage of preserving video information in the light portion of the image that would be lost in sensor saturation and information in the dark portion that would be lost to minimum sensitivity. In this connection it is to be appreciated that the system provides a signal containing full dynamic range information which may be recorded or utilized without combination of fields or frames and a corresponding reduction in contrast. In many applications the reduction in temporal resolution at a fixed exposure is more than compensated by the increase in dynamic range. Another advantage is that the system and method are capable of producing a continuous sequence of video signals comprising video fields or frames representing different, e.g., relatively short and relatively, long exposures,

and using that sequence of video signals to generate a flicker-free video display. Also, the buffered multiplexer makes it possible to generate two or more separate sequences of video fields with each representing different exposure times, and to use those two or more sequences to simultaneously generate two or more separate displays each characterized by a different exposure value. A further advantage is that the invention may be implemented using a conventional video camera of the kind having an electronic shutter, thereby taking advantage of the relatively low cost of commercially available cameras. A further advantage is that the invention may use black and white video cameras or color video cameras.

0040405 08100

What Is Claimed Is:

1. A method of producing a video recording with improved dynamic range comprising:

providing a video camera comprising a video detector capable of converting an optical image into a sequence of video fields or frames, and an electronic shutter for adjusting the amount of light received by said detector from an optical image viewed by said camera;

operating said camera to capture an optical image;

commanding said electronic shutter to vary the amount of light received by said video detector from said captured optical image whereby to produce from said detector an output video signal constituting a sequence of video fields or frames representing the captured optical image, with said sequence comprising at least first and second fields or frames representing different exposure values of the captured image occurring repetitively in said sequence according to a predetermined repetition frequency;

processing said output video signal so as to produce a modified video signal consisting of a continuous sequence of said first fields or frames or a continuous sequence of said second fields or frames; and

selectively applying said modified video signal as an input signal to a video display apparatus whereby to cause said apparatus to display said captured optical image according to the first or second fields or frames contained in said modified video signal.

2. A method according to claim 1 further including the step of recording said output video signal for use subsequently to drive a display means so that

said captured optical image may be displayed according to the information contained in said first or second fields or frames.

3. A method of producing a video recording with improved dynamic range comprising:

providing a video camera comprising a video detector capable of converting an optical image into a sequence of video fields or frames, and an electronic shutter for adjusting the amount of light received by said detector from an optical image viewed by said camera;

operating said camera to capture an optical image;

commanding said electronic shutter to vary the amount of light received by said video detector from said captured optical image whereby to produce from said detector an output video signal constituting a sequence of video fields or frames representing the captured optical image, with said sequence comprising at least first and second fields or frames representing different exposure values of the captured image occurring repetitively in said sequence according to a predetermined repetition frequency;

recording said output video signal in a recording medium;

subsequently playing said output video signal out of said recording medium;

processing said output video signal played out of said recording medium so as to produce a modified video signal consisting of a continuous sequence of said first fields or frames or a continuous sequence of said second fields or frames; and

selectively applying said modified video signal as an input signal to a video display apparatus whereby to cause said apparatus to display said

captured optical image according to the first or second fields or frames contained in said modified video signal.

4. A method of producing a video recording with improved dynamic range comprising:

providing a video sensor capable of converting an optical image into a video signal comprising a sequence of video fields or frames representing the optical image;

operating said video sensor to capture an optical image and simultaneously varying the amount of light received by said video sensor during the time frame of each video field or frame so that the resulting video signal representing said captured optical image will constitute a sequence of video fields or frames comprising at least first and second fields or frames representing substantially different exposure values of the captured image occurring repetitively in said sequence;

deriving from said resulting video signal a modified video signal comprising a continuous sequence of said first fields or frames or a continuous sequence of said second fields or frames;

and applying said modified video signal to a display means whereby said captured optical image is displayed according to the video information contained in said modified video signal.

5. A method according to claim 4 further including the step of recording said resulting video signal for use subsequently to drive a display means so that said captured optical image may be displayed according to the information contained in said first or second fields or frames.

6. A method according to claim 4 wherein said modified video signal is produced by processing said resulting video signal so as to blank out said second fields or frames and replacing said blanked-out second fields or frames with said first fields or frames.

7. A video camera system comprising:

a video camera for capturing an optical image and producing an output video signal that characterizes a continuous sequence of video fields or frames representing the captured image, said camera comprising a video detector means for generating said output video signal according to the light received from said image, and exposure control means for adjusting the amount of light received by said video detector from the optical image;

an exposure controller for said exposure control means so as to vary the amount of light on a video field or frame basis, whereby said output video signal characterizes an alternating sequence of at least first and second fields or frames of substantially different exposures; and

means responsive to said output video signal for accomplishing one or more of the following actions: (a) producing a video display in response to only said first fields or frames; (b) producing a video display in response to only said second fields or frames; and (c) recording said output video signal for use subsequently to produce a video display in response to said first fields or frames or said second fields or frames.

8. A video camera system according to claim 7 wherein said last-mentioned means produces a first video display according and in response to said first fields or frames and a second concurrent display according and in response to said second fields or frames.

9. A video camera recording system comprising:

a video camera for capturing an optical image and producing an output video signal that characterizes a continuous sequence of video fields or frames representing the captured image, said camera comprising a video detector means for generating said output video signal according to the light received from said image, and exposure control means for adjusting the amount of light received by said video detector from the optical image;

an exposure controller for said exposure control means so as to vary the amount of light on a video field or frame basis, whereby said output video signal characterizes an alternating sequence of at least first and second fields or frames of different exposures;

recorder means for recording and playing back said output video signal;

signal processing means coupled to said recorder means for receiving said output video signal as it is read out of said recorder means and deriving therefrom a modified video signal comprising a sequence of only said first video fields or frames or only said second video fields or frames; and

means responsive to said modified video signal producing a video display in accordance with said sequence of first or second fields or frames.

10. A video camera system in accordance with claim 9 wherein said first and second fields or frames are produced non-sequentially.

11. A video camera system in accordance with claim 9 wherein said first and second fields or frames are produced non-sequentially and recorded in the order in which they are produced.

12. A video camera system in accordance with claim 9 wherein said first and second fields or frames are produced in a consistent repetitive sequence in which the period of repetition is greater than or equal to the period of two video fields or frames.

13. A video camera system in accordance with claim 9 wherein said video detector means comprises is a CCD or MOS device.

14. A video camera system comprising:

means for producing a series of video signals representing a sequence of video fields or frames of a selected optical image with at least certain of the video fields or frames comprising data representing a first exposure level and others of said fields or frames comprising video data representing a second greater or lesser exposure level; and

means for processing and utilizing said video signals to provide a flicker free video display of said selected optical image.

15. A video camera system according to claim 14 wherein said certain video fields or frames are interspersed in said sequence among said other fields or frames.

16. A video camera system according to claim 14 wherein said last-mentioned means comprises a multiplexer for blanking said certain fields or frames that comprise data representing said first exposure level and replacing said blanked fields or frames with fields or frames comprising data representing said second exposure level, whereby to produce a modified

video signal; and further comprising means for applying said modified video signal to a video display means to provide a flicker free video display of said optical image according to the data representing said second exposure level.

17. A method for capturing and displaying video images comprising:

using a video camera to generate a video signal output that defines a continuous sequence of video fields or frames representing a captured optical image, with at least first and second fields or frames representing the image captured with first and second different exposure times respectively, and said first and second fields and frames being produced in a consistent repetitive sequence with said first video fields or frames being interspersed in said continuous sequence among said second video fields or frames;

processing said video signal output to provide (1) a first modified video signal that defines a continuous sequence of said first fields or frames, and (2) a second modified video signal that defines a continuous sequence of said second fields or frames; and

utilizing said first and second modified video signals to produce separate displays of said captured optical image according to the exposures represented respectively by said by said first and second fields or frames.

18. A method of producing a video recording with improved dynamic range comprising:

providing a video sensor capable of converting an optical image into a video signal comprising a sequence of video fields or frames representing the optical image;

operating said video sensor to capture an optical image and simultaneously varying the amount of light received by said video sensor

applying said modified video signal to a display means whereby said captured optical image is displayed according to the video information contained in said modified video signal.

- using said video signal to generate a video display of the video images captured using only said first exposure time.

- E3-01**

- E3-01**

ABSTRACT

The invention provides for capturing and displaying video images by (1) creating a video signal comprising a succession of video fields or frames containing optical image video data representing the captured optical image, with a plurality of first video fields or frames representing the optical image at a first exposure level and a plurality of second video fields or frames representing the optical image at a second exposure level different from the first exposure level, with the first field or frames being interspersed among said second fields or frames, and (2) utilizing that video signal to (a) generate a video display of the image represented by said first video fields or frames or the image represented by said second video fields or frames, or (b) concurrently generate a first video display of the image represented by said first video fields or frames and a second video display of the image represented by said second video fields or frames. In addition to, or instead of, using the video signal output to generate a video display in real time, the invention provides for recording the video signal output of the camera, and subsequently using the recorded video signal to generate video displays of the optical image represented by said first or second fields or frames consisting of the optical image data represented by said first or second video fields or frames.

DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "IMPROVED DYNAMIC RANGE VIDEO CAMERA, RECORDING SYSTEM, AND RECORDING METHOD", the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim priority benefits under Title 35, United States Code, Section 119(e), of U.S. Provisional Patent Application Serial No. 60/149,237, filed August 17, 1999 for DYNAMIC RANGE VIDEO CAMERA, RECORDING SYSTEM, AND RECORDING METHOD.

I hereby appoint Pandiscio & Pandiscio, a firm composed of Nicholas A. Pandiscio, Registration No. 17293, Mark J. Pandiscio, Registration No. 30883, Scott R. Foster, Registration No. 20570, and James A. Sheridan, Registration No. 43114, or any of them, of 470 Totten Pond Road, Waltham, Massachusetts 02451-1914, (Telephone No. 781-290-0060), my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both,

under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's signature: _____
Inventor's full name: John Crawford
Date: _____
Residence: 11 Donna Pass, Hopkinton, MA 01748
Post Office Address: same
Citizenship: USA

Inventor's signature: _____
Inventor's full name: Herbert A. Thaler
Date: _____
Residence: 680 Pleasant Street, Framingham, MA 01701
Post Office Address: same
Citizenship: USA

Inventor's signature: _____
Inventor's full name: Koichiro Hori
Date: _____
Residence: 24 Parker Road, Framingham, . MA 01702
Post Office Address: same
Citizenship: USA

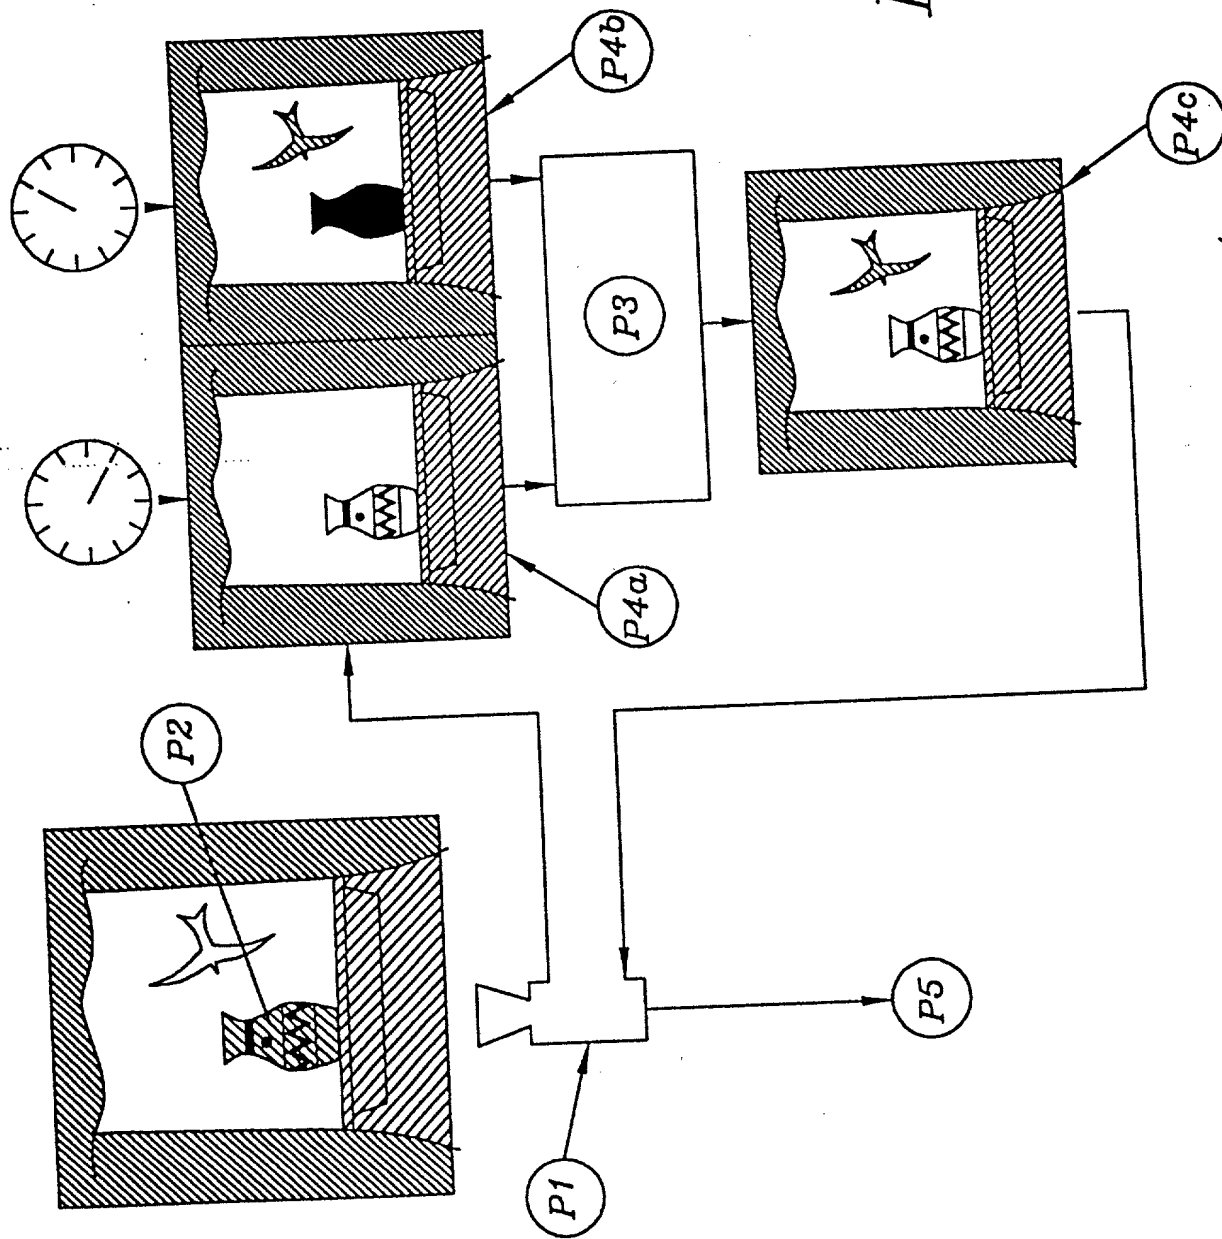

PRIOR ART

FIGURE 1.

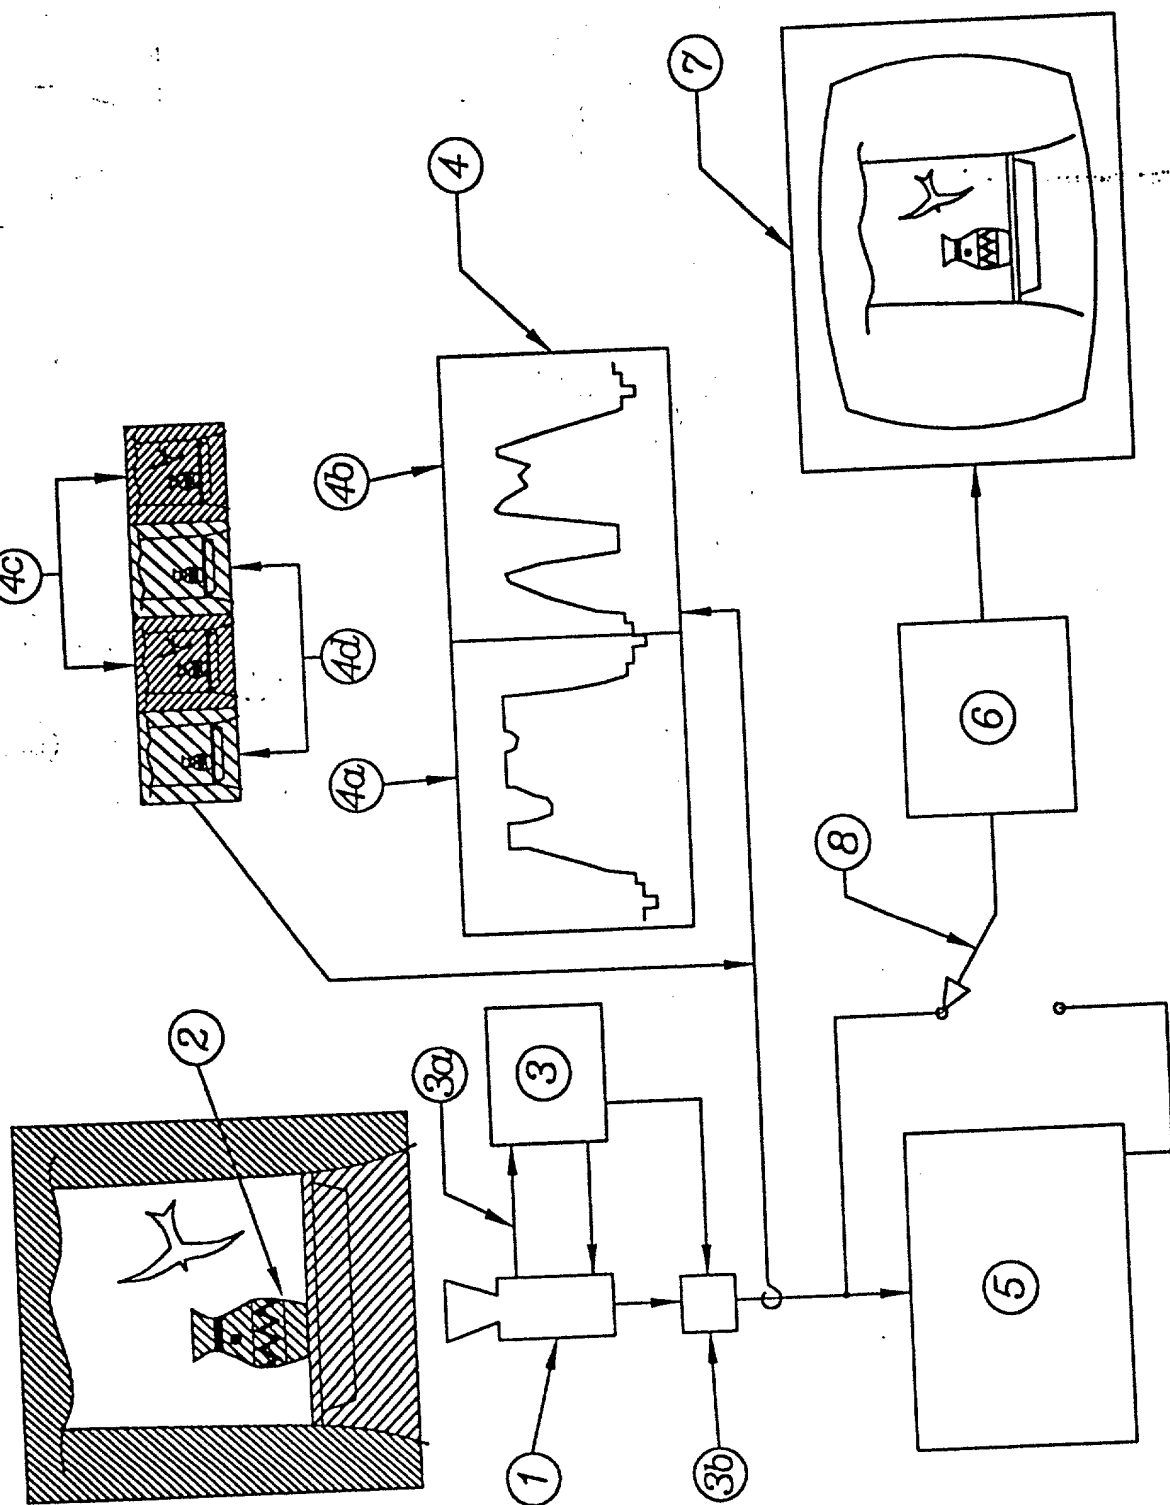


FIGURE 2.

The diagram illustrates a control system for a multi-channel device. It features several interconnected blocks and components:

- Block 9:** A small rectangular block at the top left, receiving an input from the left and outputting to blocks 4a and 4b.
- Block 4:** A large rectangular block containing two sub-sections, 4a and 4b. Block 4a receives input 13a and outputs 13b. Block 4b receives input 13 and outputs 13a. Both sub-sections contain waveform plots.
- Block 11:** A circular block with an 'X' inside, receiving inputs from block 4 and block 9f. Its output goes to block 12.
- Block 12:** A triangular block (inverter) receiving input from block 11. Its output goes to block 14.
- Block 14:** A rectangular block receiving inputs from block 12 and block 9g. Its output goes to block 10.
- Block 10:** A circular block at the bottom right, receiving input from block 14. It is connected to a multi-channel device (13) via a switch (12) and a line labeled 'I'.
- Block 9:** A rectangular block at the bottom left, receiving input from the left and outputting to blocks 9a and 9b.
- Block 9f:** A rectangular block receiving input from block 9 and outputting to block 11.
- Block 9a and 9b:** Two rectangular blocks at the bottom, receiving inputs from block 9. They contain waveform plots.
- Block 13:** A multi-channel device at the bottom right, represented by a shaded rectangular area with multiple input/output lines labeled 7a, 7b, 7d, and 7e.

FIGURE 3.

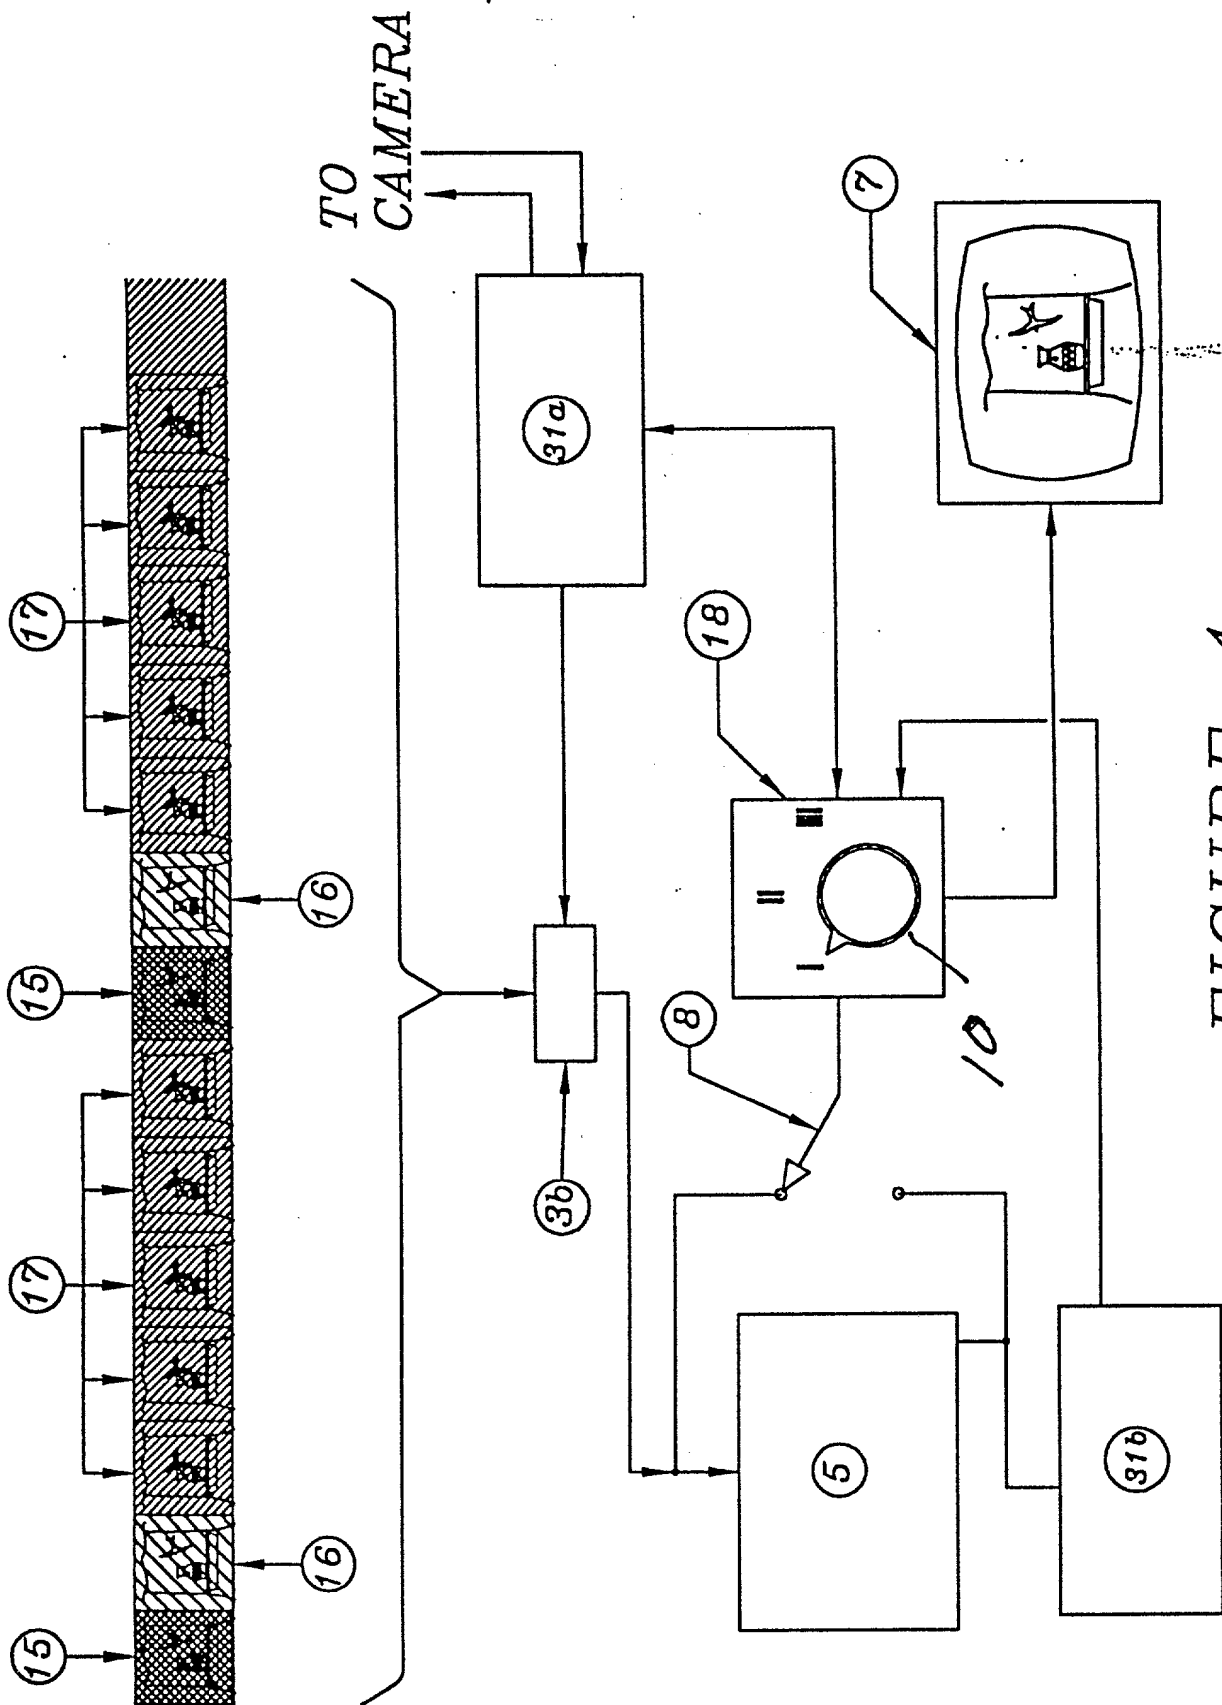


FIGURE 4.

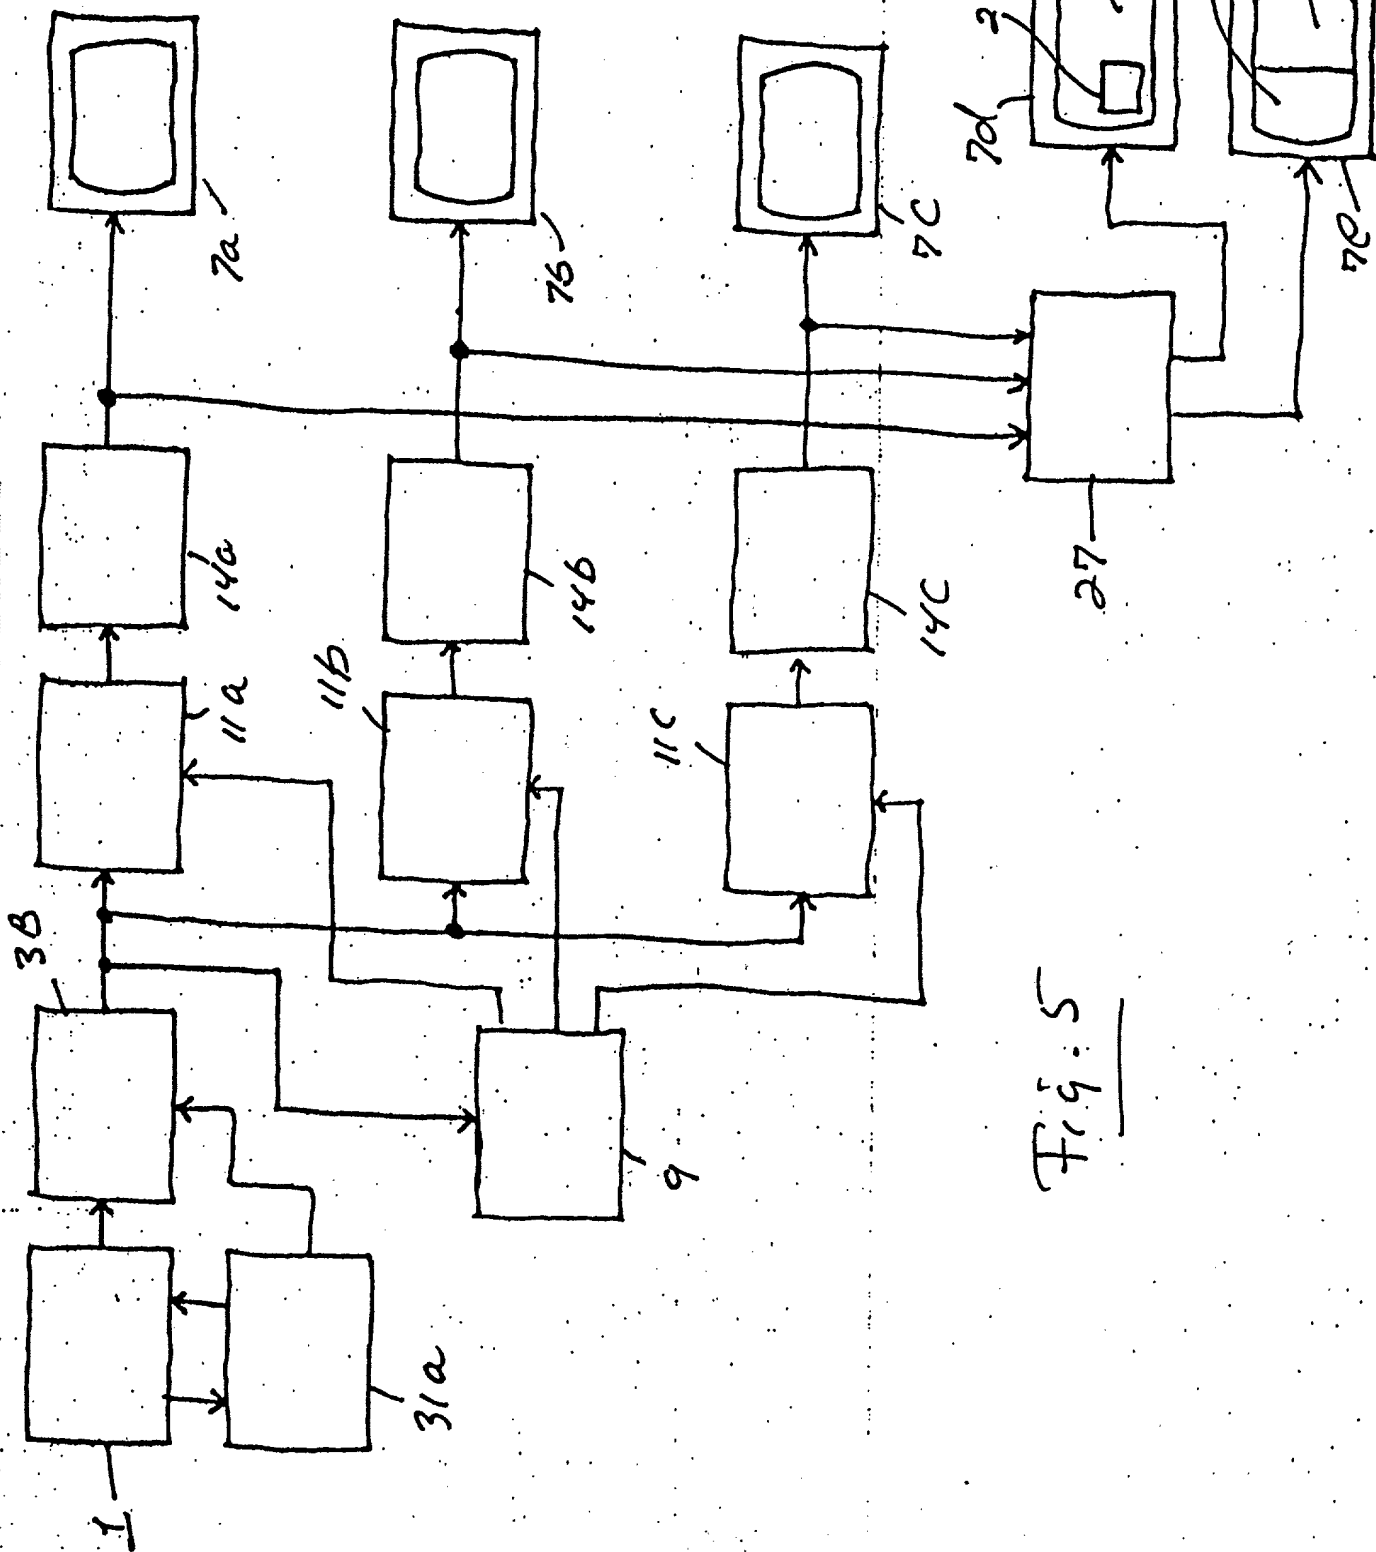


Fig. 5